




**Fescue Xtreme (ELFX)**

Face Weight: 80 oz sq yd  
 Pile Height: 2.00 inch  
 Color(s): Blend & Spring Green  
 Roll Width: 15 ft  
 Infill recommended: Yes

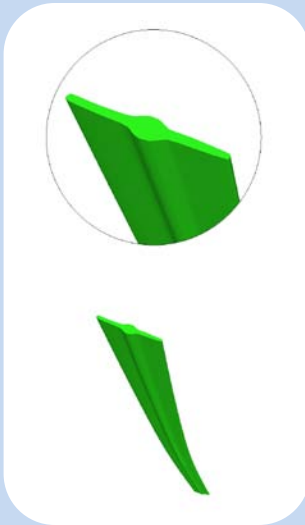

<u>Property</u>	<u>Imperial Unit</u>	<u>Metric Unit</u>	<u>Description</u>
<b>Fiber Type</b>			100% Polyethylene
<b>Fiber Mass</b>	10800 denier 7000 denier (Root Zone)	12000 d tex 8000 d tex (Root Zone)	MS PRO Dull TXT PE thatch
<b>Tufted Pile Height *</b>	2.00 in	50 mm	
<b>Tufted Face Weight *</b>	80 oz	2713 g/m <sup>2</sup>	
<b>Tufting Gauge</b>	¼		
<b>Primary Backing</b>	7.0 oz/yd <sup>2</sup>	237 g/m <sup>2</sup>	Stabilized dual layered woven polypropylene
<b>Secondary Backing</b>	10.0 oz/yd <sup>2</sup>	339 g/m <sup>2</sup>	DuraFlo E.E.B.S.®
<b>Non Woven Scrim</b>	2.7 oz/yd <sup>2</sup>	91.5 g/m <sup>2</sup>	
<b>Total Weight *</b>	93.7 oz/yd <sup>2</sup>	3380 g/m <sup>2</sup>	
<b>Tufted Roll Width *</b>	15 ft	4.57 m	

*\* Specifications provided above are tufted measurements. Final measurements can change during backing processes  
 Challenger Industries, Inc. is not responsible to typing errors on specifications listed above*

**Global Leader in Synthetic Turf**  
 World's Most Environmentally Friendly Artificial Grass

Challenger Industries, Inc. • [www.challengerind.com](http://www.challengerind.com) • 800-334-TURF (8873)

Visit our factories at 205 Boring Drive, Dalton, GA 30721

